


REVISION			
REV	DATE	DESCRIPTION	APPRO.BY

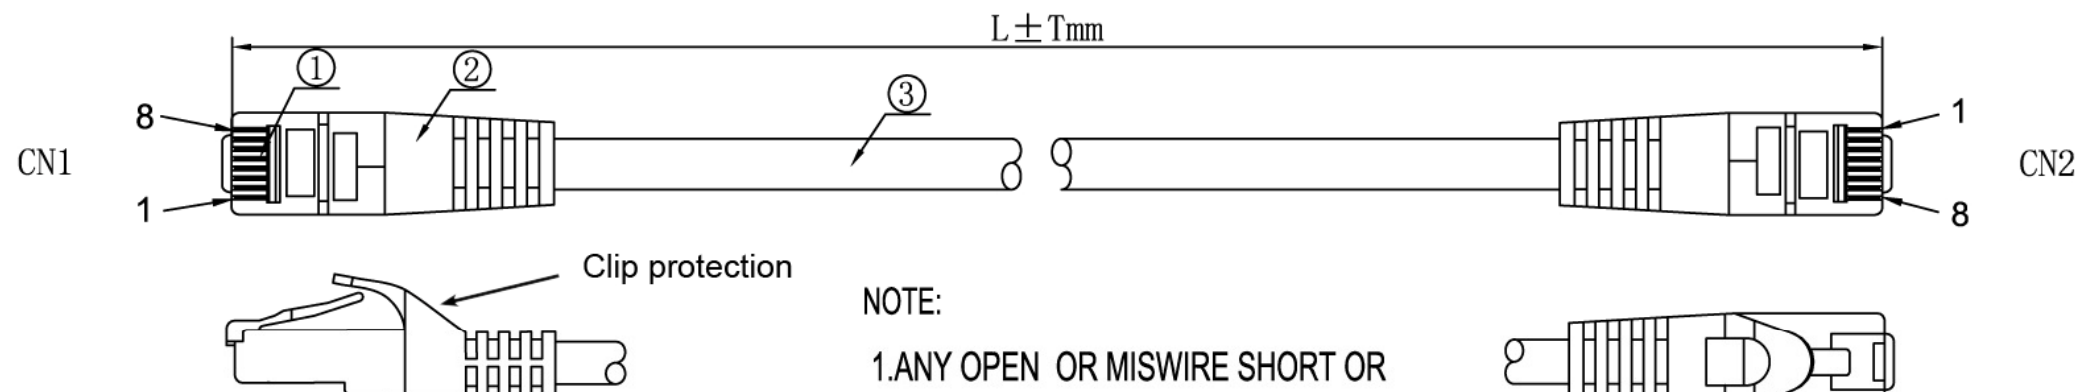


NOTE:

- 1.ANY OPEN OR MISWIRE SHORT OR INTERMITTENCE IS NOT PERMITTED
- 2.KEEP CLEAN
- 3.RoHS COMPLIANT
4. PRINTING: CAT.6 U/UTP AWG24/7 stranded
x 4 pairs LSZH Cable

NOTE 1:

WIRING DIAGRAM



ITEM NO.	LENGTH
K8104BL.0,5M	500±5mm
K8104BL.1M	1000±10mm
K8104BL.2M	2000±20mm
K8104BL.3M	3000±30mm
K8104BL.5M	5000±50mm
K8104BL.7,5M	7500±75mm
K8104BL.10M	10000±100mm



3	CABLE	Cat.6 U/UTP AWG24/7 Jacket: LSZH/BLUE OD:5.9±0.2mm	1
2	OVERMOLD	PVC Colour: BLUE + Clip protection	2
1	CONNECTOR	RJ45 8P8C U/UTP GOLD PLATED 3-50" IEC60603-7-4	2
NO.	MAT.NAME	DESCRIPTION	Q'TY

CUSTOMER'S ITEM		K8104BL.X	CUSTOMER		EFB	
DRAWING			TITLE		UTP CAT.6 8P8C TO 8P8C	
UNIT	mm	SCALE	1:1	REV	A/O	
DRAWN BY		CHECK BY	APPRO BY		DATE	
			LIUJINGJING		2011.05.24	